



KIEN1000B

8 Port Unmanaged
Industrial Ethernet Switch

CE, FCC, UL, RoHS,
Chinese State Grid
Certification

Overview

The KIEN1000B is an unmanaged 8-port industrial Ethernet switch. It offers 8 10/100Base-T(X) ports. With the plug-and-play feature, it is started up shortly. KIEN1000B offers dual redundant power inputs.

Features

1. Complies with EMC industrial level 4 regulated in IEC61850 standard
2. Dual redundant power inputs
3. Ribbed aluminum case for heat dissipation (fanless)
4. Operating Temperature: -40 to 85°C (-40 to 185°F)
5. IP40 protection class
6. DIN Rail or wall mounting

Technical Specifications

Standard

IEEE802.3
IEEE802.3u
IEEE802.3x
Store and forward switching mode

Network

Chain and star network topology

Interface

10/100M Copper Ports: 8 10/100Base-T(X) ports, RJ45

Cable

Twisted Pair: 0-100m (Standard CAT5, CAT5e network cable)
Multi Mode Fiber: 1310nm, 0-5km
Single Mode Fiber: 1310nm, 0-40km; 1550nm, 0-80km

Power Requirements

Power input: 12VDC (9-18VDC), 24VDC (18-36VDC), 48VDC (36-72VDC), 110VDC (70-140VDC), 220VAC/DC (110-265VAC/154-370VDC), dual redundant DC power inputs
Power terminal: 3-Pin 3.81mm-spacing plug-in terminal block
Power consumption: <6W

Physical Characteristics

Casing: Ribbed aluminum case (fanless)
Protection class: IP40
Dimensions (WxHxD): 55.4x139x119.5 mm (2.18x5.47x4.70 in.)
Weight: 1kg (2.205 pound)
Installation: DIN-Rail or wall mounting

Environmental Limits

Operating Temperature: -40 to 85°C (-40 to 185°F)
Storage Temperature: -40 to 85°C (-40 to 185°F)
Ambient Relative Humidity: 0 to 95% (non-condensing)

Approvals

IEC61000-4-2 (ESD): ±8KV contact discharge, ±15KV air discharge
IEC61000-4-3 (RS): 10V/M (80-1000MHz)
IEC61000-4-4 (EFT): power line ±4KV, data line ±2KV
IEC61000-4-5 (Surge): power line ±4KV CM/±2KV DM, data line ±2KV
IEC61000-4-6 (CS): 3V (10KHZ-150KHZ), 10V (150KHZ-80MHZ)
IEC61000-4-8 (Power frequency magnetic field): 100A/m cont. 1000A/m, 1s to 3s
IEC61000-4-12/18 (Damped oscillatory wave): 2.5KV CM, 1KV DM
IEC61000-4-10 (Damped oscillatory): 30A/m
IEC61000-4-16 (Common mode conduct): 30V cont. 300V, 1s
FCC CFR47 Part 15/EN55022: Class A&B
IEC61000-6-2 (Industrial Standards), IEC61850-3 (Substations), IEEE1613 (Electric Power Substations), EN50121-4 (Railway Applications)

UL, CE, FCC, ROHS, Chinese State Grid Certification


MTBF

35 years

Warranty

5 Years

Mechanical Drawing

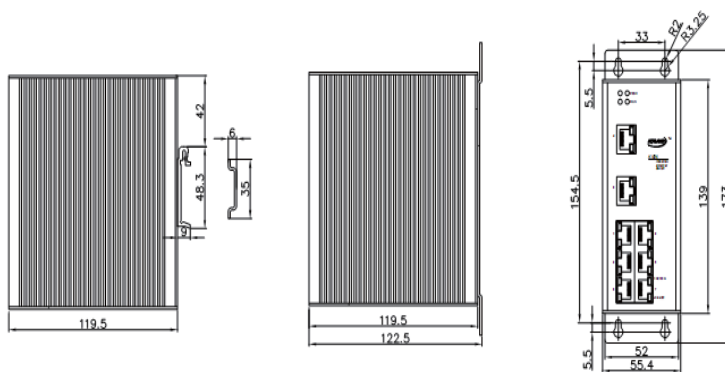

Ordering Information

KIEN1000B-8T: 8 x 10/100Base-T(X), RJ45
Power supply: 12VDC, 24VDC, 48VDC, 110VDC, 220VDC, dual redundant power inputs
220VAC, single power input

Please visit our website: www.kyland.cn for the latest updates.