

SICOM2024M

24 Port Managed Industrial Ethernet Switch



CE, FCC, ROHS

Overview

SICOM2024M is an entry-level managed industrial Ethernet switch specially designed by KYLAND for industrial applications. It supports up to 24 10/100Base-T(X) and 2 100Base-FX ports, and it also supports Kyvision 3.0 management software. Its high-performance switch engine, solid and closed case, high-efficiency single-rib-shape case for heat dissipation without using fans, overcurrent, overvoltage and EMC protection at power input side, and excellent EMC protection of RJ45 port make SICOM2024M applicable in harsh and dangerous industrial environments.

Features

1. Supports 2 100Base-FX ports and 24 10/100Base-T(X) RJ45 ports
2. Supports RSTP/STP (IEEE802.1w/d) redundant protocol
3. Flexible network topologies: tree, star and chain
4. Supports IGMP Snooping, port trunking, port mirroring, QoS, VLAN and ACL
5. Bandwidth configuration controls port bandwidth properly
6. Port speed limitation and special broadcast storm control
7. Unicast attack detection
8. IP and MAC address conflict detection
9. Supports multiple management methods including CLI, TELNET, WEB, SNMP V1/V2 and OPC
10. EMC industrial level 4, specially designed for harsh electromagnetic interference environment
11. Abundant power supply options, dual redundant power supplies
12. Relay alarm output for the loss of power
13. Operating temperature: -40 to 85°C (-40 to 185°F)
14. Ribbed aluminum case for heat dissipation, fanless design
15. Rack-mounting (19" 1U) installation
16. IP40 protection class.
17. Unified management software for SICOM series: Kyvision3.0

Technical Specifications**Standard**

IEEE802.3
IEEE 802.3u
IEEE 802.3x
IEEE802.1d
IEEE802.1w
IEEE802.1p
IEEE802.1q
Store and forward switching mode

Network

Tree, star and chain network topology

Interface

100M Fiber Ports: 2 x 100Base-FX ports, FC/SC/ST
10/100M Copper Ports: 24 x 10/100Base-T(X) ports, RJ45
CONSOLE Interface: RS232, RJ45
Alarm Contact: 3-Pin 3.81mm-spacing terminal block, 250VAC/220VDC Max; 2A Max; 60W Max
LED Indicator: RUN, PWR1, PWR2; LINK, DPX (A-B); LINK/ACT, 10M/100M (1-24)

Performance

Backplane switching capacity: 8.8G
MAC Address Table Size: 8K

Cable

Twisted Pair: 0-100m (Standard CAT5, CAT5e network cable)
Multi Mode Fiber: 1310nm, 0-5km (100Mbps)
Single Mode Fiber: 1310nm, 0-40km; 1550nm, 0-80km

Power Requirements

Power input: 24VDC (18-36VDC), 48VDC (36-72VDC), 110VDC (82-185VDC), 220VAC/DC (85-264VAC/120-370VDC), dual redundant power supplies
Power terminal: 5-Pin 5.08mm-spacing plug-in terminal block
Power consumption: <15W

Physical Characteristics

Casing: Ribbed aluminum case (fanless)
Protection class: IP40
Installation: 19 inch 1U rack mounting
Dimensions (WxHxD): 482.6x44x245mm (19x1.73x9.65 in)
Weight: 2.5kg

Environmental Limits

Operating Temperature: -40 to 85°C (-40 to 185°F)
Storage Temperature: -40 to 85°C (-40 to 185°F)
Ambient Relative Humidity: 0 to 95% (non-condensing)

Approvals

IEC61000-4-2 (ESD): ±8KV contact discharge, ±15KV air discharge
IEC61000-4-3 (RS): 10V/M (80-1000MHz)
IEC61000-4-4 (EFT): power line ±4KV, data line ±2KV
IEC61000-4-5 (Surge): power line ±4KV CM/±2KV DM, data line ±2KV
IEC61000-4-6 (CS): 3V (10KHZ-150KHZ), 10V (150KHZ-80MHZ)
IEC61000-4-8 (Power frequency magnetic field): 100A/m cont. 1000A/m, 1s to 3s
IEC61000-4-12/18 (Damped oscillatory wave): 2.5KV CM, 1KV DM
IEC61000-4-10 (Damped oscillatory): 30A/m
IEC61000-4-16 (Common mode conduct): 30V cont. 300V, 1s
FCC CFR47 Part 15/EN55022: Class A&B
IEC61000-6-2 (Industrial Standards), IEC61850-3 (Substations), IEEE1613 (Electric Power Substations), EN50121-4 (Railway Applications)

CE, FCC, ROHS





MTBF

35 years

Warranty

5 Years

Mechanical Drawing

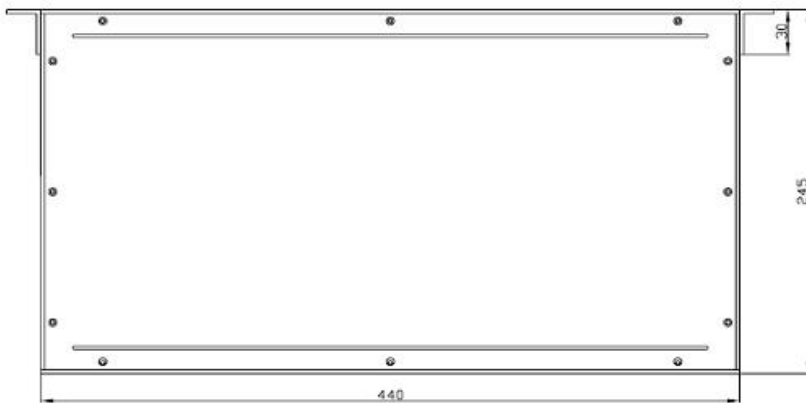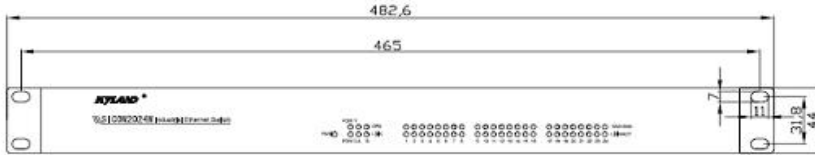

Ordering Information

Model	Description
SICOM2024M-4S(M)-24T	4 x 100Base-FX, SM/MM, FC/SC/ST; 24 x 10/100Base-T(X), RJ45
SICOM2024M-2S(M)-24T	2 x 100Base-FX, SM/MM, FC/SC/ST; 24 x 10/100Base-T(X), RJ45
SICOM2024M-S(M)-24T	1 x 100Base-FX, SM/MM, FC/SC/ST; 24 x 10/100Base-T(X), RJ45
SICOM2024M-24T	24 x 10/100Base-T(X), RJ45
SICOM2024M-2S(M)-16T	2 x 100Base-FX, SM/MM, FC/SC/ST; 16 x 10/100Base-T(X), RJ45
SICOM2024M-S(M)-16T	1 x 100Base-FX, SM/MM, FC/SC/ST; 16 x 10/100Base-T(X), RJ45
SICOM2024M-16T	16 x 10/100Base-T(X), RJ45

Power Supply: 24VDC, 48VDC, 110VDC, 220VAC/DC, dual redundant power supplies (optional)

Please visit our website: www.kyland.cn for the latest updates.