

**SICOM3024P**

24+4G Port Managed Industrial Ethernet Switch

KEMA, CE, FCC, ROHS  
Chinese State Grid Certification**Overview**

SICOM3024P is a KEMA approved IEC61850 compliant managed industrial Ethernet switch specifically designed to operate stably in electrically harsh and climatically demanding utility substation and industrial environments. It offers up to 24 100Base TP/fiber ports, 4 Gigabit SFP slots or 10/100/1000Base-T(X) ports. The redundant function of optical fiber network, independent entire network management channel, redundant power supplies function, and entire network real-time management system provide multiplex guarantee for reliable operation of the system.

**Features**

1. Supports 4 Gigabit SFP slots or 10/100/1000Base-T(X) ports, 24 100Base TP/fiber ports
2. Low time delay and zero packet loss features while working with full load for a long period of time, specially designed for digital substations
3. Supports DT-Ring protocols (recovery time<50ms), RSTP/STP (IEEE802.1w/d)
4. Advanced ring topology protocol avoiding broadcast storm
5. Supports IGMP Snooping, port trunking, port mirroring, QoS, VLAN, ACL
6. Supports SSH/SSL to increase the network security
7. Real time temperature detecting and alarming, alarm value can be set
8. System operation log's writing and uploading function
9. Supports port speed limitation and special broadcast storm control
10. Precise real time clock
11. IP and MAC address confliction detection
12. Unicast attack detection
13. Safe MAC and port binding function, static FDB supported
14. Bandwidth configuration controls port bandwidth properly
15. Improves network monitoring ability through RMON (group 1, 2, 3 and 9)
16. Supports multiple management functions including CLI, TELNET, WEB, SNMP V1/V2/V3 and OPC
17. EMC industrial level 4, specially designed for harsh electromagnetic interference environment
18. Various power supply options, dual redundant power supplies (optional)
19. Relay alarm output for the failure of power
20. Operating temperature: -40 to 85°C (-40 to 185°F)
21. Ribbed aluminum case for heat dissipation (patent), fanless design
22. Rack-mounting (19 inch 1U) installation
23. IP40 protection class
24. Unified management software for SICOM series: Kyvision3.0.

**Technical Specifications****Standard**

IEEE802.3  
IEEE 802.3u  
IEEE 802.3x  
IEEE802.3z  
IEEE802.3ab  
IEEE802.1d  
IEEE802.1w  
IEEE802.1p  
IEEE802.1q  
IEEE802.1x  
Store and forward switching mode

**Network**

Ring, chain, star and tangent ring network topology

**Interface**

Gigabit Ethernet Ports: One slot for Gigabit port. The slot supports 4 10/100/1000Base-T(X) ports, RJ45 or 4 Gigabit SFP slots for 1000Base-SX/LX/LH/ZX, LC interface modules  
Fast Ethernet Ports: 3 slots for 100M ports. Each slot supports interface module with 8 100Base TP/fiber ports  
CONSOLE Interface: RS232, RJ45  
Alarm Contact: 3-Pin 3.81mm-spacing terminal block, 250VAC/220VDC Max; 2A Max; 60W Max  
LED Indicator: RUN, ALARM, PWR1, PWR2; LINK, DPX (G1-G4); LINK/ACT, 10M/100M (1-24)

**Performance**

Backplane switching capacity: 12.8G  
MAC Address Table Size: 8K

**Cable**

Twisted Pair: 0-100m (Standard CAT5, CAT5e network cable)  
Multi Mode Fiber: 1310nm, 0-5km (100Mbps); 1310nm 0-2km (1000Mbps)  
Single Mode Fiber: 1310nm, 0-40km; 1550nm, 0-80km

**Power Requirements**

Power input: 24VDC (18-36VDC), 48VDC (36-72VDC), 110VDC (82-185VDC), 220VAC/DC (85-264VAC/120-370VDC), dual redundant power supplies (optional)  
Power terminal: 3-Pin 9.5mm-spacing plug-in terminal block  
Power consumption: <35W

**Physical Characteristics**

Casing: Ribbed aluminum case (fanless)  
Protection Class: IP40  
Installation: 19 inch 1U rack mounting  
Dimensions (WxHxD): 482.6x44x420mm (19x1.73x16.53 in)  
Weight: 5kg (11.023 pound)

**Environmental Limits**

Operating Temperature: -40 to 85°C (-40 to 185°F)  
Storage Temperature: -40 to 85°C (-40 to 185°F)  
Ambient Relative Humidity: 0 to 95% (non-condensing)

**Approvals**

IEC61000-4-2 (ESD): ±8KV contact discharge, ±15KV air discharge  
IEC61000-4-3 (RS): 10V/M (80-1000MHz)


IEC61000-4-4 (EFT): power line  $\pm 4\text{KV}$ , data line  $\pm 2\text{KV}$   
 IEC61000-4-5 (Surge): power line  $\pm 4\text{KV CM}/\pm 2\text{KV DM}$ , data line  $\pm 2\text{KV}$   
 IEC61000-4-6 (CS): 3V (10KHZ-150KHZ), 10V (150KHZ-80MHZ)  
 IEC61000-4-8 (Power frequency magnetic field): 100A/m cont. 1000A/m, 1s to 3s  
 IEC61000-4-12/18 (Damped oscillatory wave): 2.5KV CM, 1KV DM  
 IEC61000-4-10 (Damped oscillatory): 30A/m  
 IEC61000-4-16 (Common mode conduct): 30V cont. 300V, 1s  
 FCC CFR47 Part 15/EN55022: Class A&B  
 IEC61000-6-2 (Industrial Standards), IEC61850-3 (Substations), IEEE1613 (Electric Power Substations), EN50121-4 (Railway Applications)

KEMA, CE, FCC, ROHS, Chinese State Grid Certification

**MTBF**  
35 years

**Warranty**  
5 Years

### Mechanical Drawing

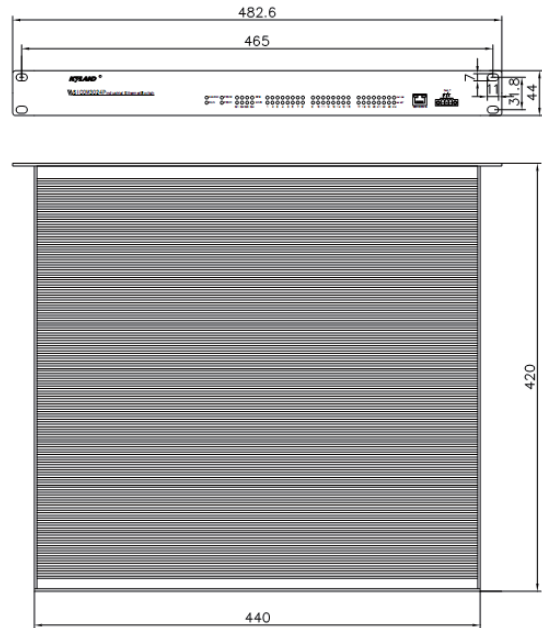

### Ordering Information

Model	Description
SICOM3024P-4GX(E)-4S(M)-20T	4 x Gigabit SFP slots (or 10/100/1000Base-T(X) RJ45 ports); 4 x 100Base-FX, SM/MM, FC/SC/ST; 20 x 10/100Base-T(X) ports, RJ45
SICOM3024P-4GX(E)-8S(M)-16T	4 x Gigabit SFP slots (or 10/100/1000Base-T(X) RJ45 ports); 8 x 100Base-FX, SM/MM, FC/SC/ST; 16 x 10/100Base-T(X) ports, RJ45
SICOM3024P-4GX(E)-12S(M)-12T	4 x Gigabit SFP slots (or 10/100/1000Base-T(X) RJ45 ports); 12 x 100Base-FX, SM/MM, FC/SC/ST; 12 x 10/100Base-T(X) ports, RJ45
SICOM3024P-4GX(E)-16S(M)-8T	4 x Gigabit SFP slots (or 10/100/1000Base-T(X) RJ45 ports); 16 x 100Base-FX, SM/MM, FC/SC/ST; 8 x 10/100Base-T(X) ports, RJ45
SICOM3024P-4GX(E)-20S(M)-4T	4 x Gigabit SFP slots (or 10/100/1000Base-T(X) RJ45 ports); 20 x 100Base-FX, SM/MM, FC/SC/ST; 4 x 10/100Base-T(X) ports, RJ45
SICOM3024P-4GX(E)-24S(M)	4 x Gigabit SFP slots (or 10/100/1000Base-T(X) RJ45 ports); 24 x 100Base-FX, SM/MM, FC/SC/ST;
SICOM3024P-4GX(E)-24T	4 x Gigabit SFP slots (or 10/100/1000Base-T(X) RJ45 ports); 24 x 10/100Base-T(X) ports, RJ45

All models without Gigabit ports are also available.  
 Power supply: 24VDC, 48VDC, 110VDC, 220VAC/DC, dual redundant power supplies (optional)

#### SFP Modules:

- SM-GSFP-TX/RJ45: SFP module with 1 x 10/100/1000M port, RJ45, 100m
- SM-GSFP-SX/LC-550: SFP module with 1 x 1000M multimode port, LC, 850nm, 550m
- SM-GSFP-LX/LC-550: SFP module with 1 x 1000M multimode port, LC, 1310nm, 550m
- SM-GSFP-LX/LC-10: SFP module with 1 x 1000M single mode port, LC, 1310nm, 10km
- SM-GSFP-LX/LC-15: SFP module with 1 x 1000M single mode port, LC, 1310nm, 15km
- SM-GSFP-LH/LC-40: SFP module with 1 x 1000M single mode port, LC, 1310nm, 40km
- SM-GSFP-ZX/LC-40: SFP module with 1 x 1000M single mode port, LC, 1550nm, 40km
- SM-GSFP-ZX/LC-60: SFP module with 1 x 1000M single mode port, LC, 1550nm, 60km
- SM-GSFP-ZX/LC-80: SFP module with 1 x 1000M single mode port, LC, 1550nm, 80km

Please visit our website: [www.kyland.cn](http://www.kyland.cn) for the latest updates.